


# UFG-05 4E

high speed RGB and DVI  
streaming frame grabber

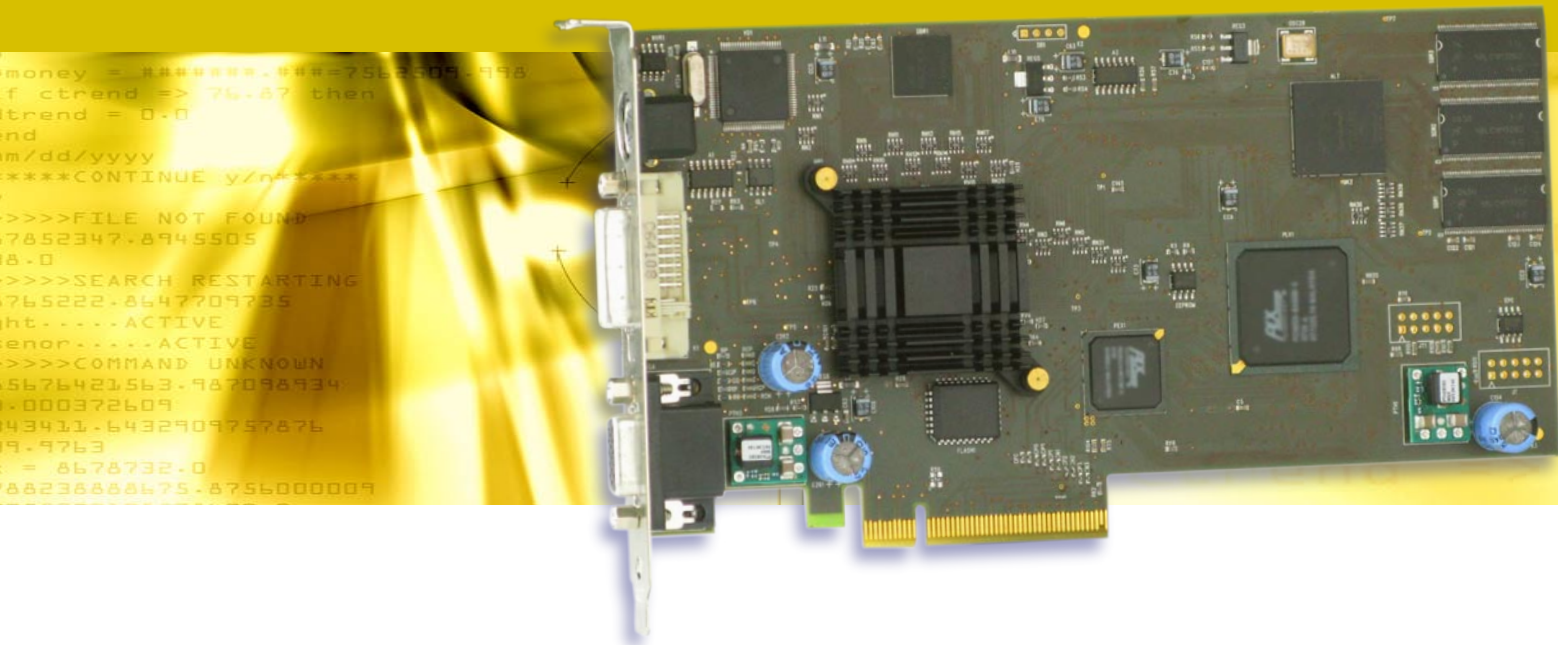

## High Speed Streaming of RGB and DVI Video

UFG-05 4E is a versatile streaming frame grabber that enables capture of high definition video from a PC and other equipment. A wide variety of standard PC tools can be used to store the video as single images or video streams. The 4-lane PCI Express bus enables the high data throughput needed to capture a high resolution input. Application areas for the UFG-05 4E can be found in medical, industrial, multimedia or in maritime environment.

## DirectShow®

UFG-05 4E can be used both in Microsoft® Windows® XP or Vista with any application supporting DirectShow®. The AVStream driver provides the full control of the capturing process, enabling the user to configure the captured resolution as well as an optimum frame rate.

## Automatic Video Signal Detection

UFG-05 4E automatically detects all standard VESA and HDTV modes and can be configured to any other timings. UFG-05 4E can be used with sync modes from CSync to Sync on Green.


## Benefits

- Capture from DVI, RGB, Component and S-video input
- Autodetect VESA and HDTV modes
- Resolutions up to 1920 x 1200 and 1080p
- Arbitrary HW scaling from 160 x 120 to 1920 x 1200
- WDM 32 bit AVStream driver
- Windows® XP and Vista support
- High speed 4-lane PCI Express bus
- Data transfer speed up to 220 MBytes/s

# UFG-05 4E

high speed RGB and DVI streaming frame grabber

03/2009

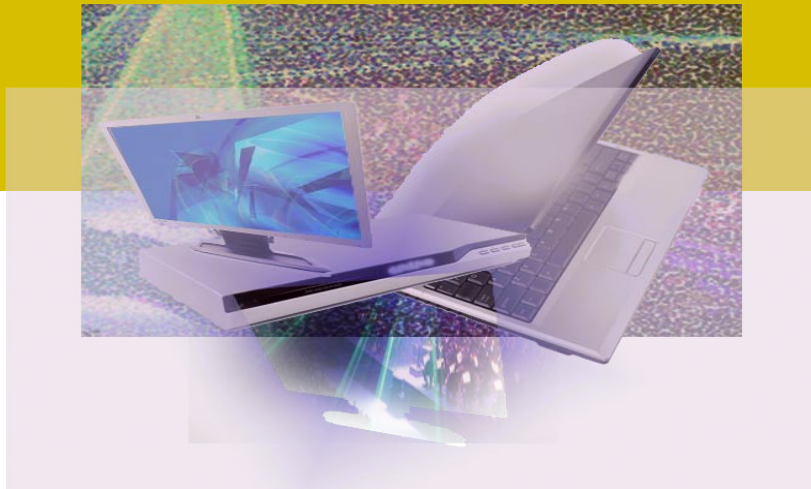

## Applications

### Video Streaming

The UFG-05 series frame grabbers are ideal for streaming high resolution video. The WDM driver is compatible with e.g. Microsoft® Media Encoder and other DirectShow applications. The high data transfer speed of the PCI Express bus enable creation of smooth, crisp and joggle-free video streams.

The table below provides *non-compressed* typical frame rates (fps, frames per second) captured with the UFG-05 4E. Please note that these values are highly dependent on the PC hardware\*.

Resolution	fps
1920 x 1200	23
1920 x 1080	27
1600 x 1200	27
1400 x 1050	36
1280 x 1024	42
1280 x 720	60
1024 x 768	60
800 x 600	60
640 x 480	60

\*) The performance record is based on tests in the following PC environment:  
Intel® Q6600 QuadCore 2.4 GHz, 4 GB RAM, Windows® XP Sp3

## Specifications

Input	S-video and Composite on S-Video connector RGB and Component on VGA connector TMDS on DVI-D connector
Input Resolution	PAL, NTSC and SECAM for composite and S-video 640 x 480 to 1920 x 1200 for VGA, Component and DVI
Color Coding	RGB or YPbPr / YCbCr
Input Pixel Frequency	25 MHz to 165 MHz
A/D Conversion	8 bits per color
Scan Modes	Progressive, interlaced
Sync Modes	Automatically detected RGBHV, RGsB, RGBC
HW Scaling	160 x 120 to 1920 x 1200
Output Format	RGB32
Data Interface	PCI Express 4 lane (1.0a). Bus master with up to 220 MBytes/second speed. Physically occupies a 8 lane slot.
Operating Systems	Windows® XP and Vista (32 bit)
SW Interface	Standard WDM driver with configuration dialogue.
Module Size	106 x 194 mm
Power Consumption	6 W max on +3.3 V; 1 W max on +12.0 V

 **UNIGRAF**

[www.unigraf.fi](http://www.unigraf.fi)

**UNIGRAF OY** Ruukintie 3, FI-02330 Espoo, Finland  
Tel +358 9 859 550, fax +358 9 802 6699

**UNIGRAF-USA** Tel +1 888 362 7960, fax +1 605 362 7961, [www.unigraf-us.com](http://www.unigraf-us.com)

Please visit [www.unigraf.fi](http://www.unigraf.fi) for listing of Unigraf Worldwide Distribution